

H51GLR04xx Range Solo


Safe shower column with stainless steel body - diameter 32 mm., equipped with "Double Water Inlet" water inlet system. Equipped with swivel shower head and 3-jet hand shower - diameter 130 mm. - with anti-torsion flexible hose - length 150 cm. Complete with thermostatic mixer and horizontal handle -left - with hand shower holder connection.

Stainless steel shower head, 5 mm thick, Ø 240 mm.

Physical data

i nysicai aata				
Dimensions (mm.)	551x548x1283			
Weight (kg.)	8,4			
Endowments				
Stainless steel screw and dowels	Fischer SX 8 6x70 Inox			
Delivery methods				
Package	LDPE bag in cardboard box			
Package dimensions (mm.)	490x115x1065			
Weight with Packaging (kg.)	10.55			
	-)			



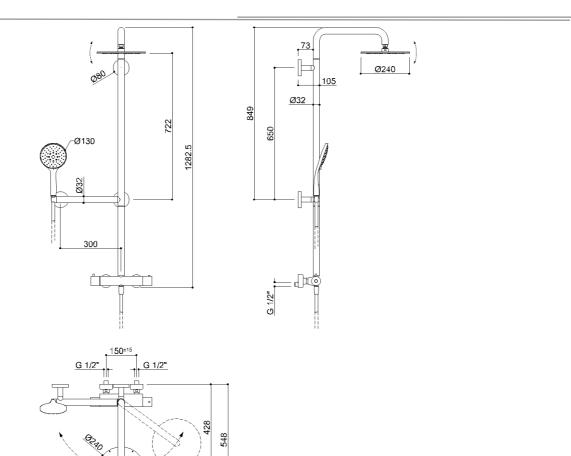




Technical Information

H51GLR04XX Range Solo

Y88JKS12

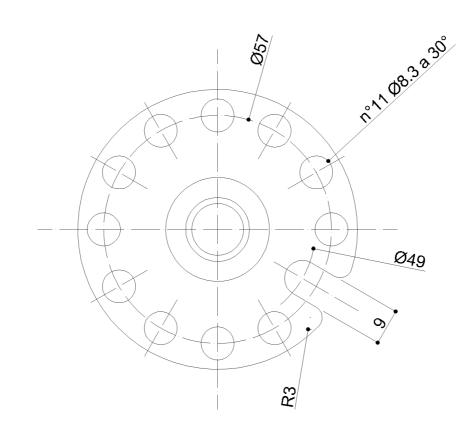

Available colors N1 N2		Resistance to load				
N2 Polished	Vertical	150 Kg	Horizontal	150 Kg		
	Safety tips					
	especially the s	Before installing and using the device, read the instructions for use an especially the safety warnings carefully and follow them. If in doubt, contact the company before using the device.				
	Information on u	Information on use				
N/A		The device is not affected by the room's temperature, though it mus				
ABS N/A	above 40°C.	, ,				
		Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.				
	Polished N/A	Polished Vertical Safety tips Before installing especially the s If in doubt, cont Information on u N/A Information on u N/A The device is no NOT be installe above 40°C. Do not install in	Polished Vertical 150 Kg Safety tips Before installing and using the de especially the safety warnings can on the safety warnings can onter the safety warnings can on the safety warnings can onter the s	Polished Vertical 150 Kg Horizontal Safety tips Before installing and using the device, read the instruct especially the safety warnings carefully and follow the lf in doubt, contact the company before using the device. N/A Information on use N/A The device is not affected by the room's temperature, NOT be installed in environments subject to temperature above 40°C. Do not install in saunas. Not comply with the indicated		

Warranty

If this product fails due to a defect in material or workmanship during the time of periods listed below for each product, Ponte Giulio will replace or repair it free of charge. . Warranty 2 YEARS

ΕN