



Do not change the standard settings of the driver!

Mounting base:



1.0

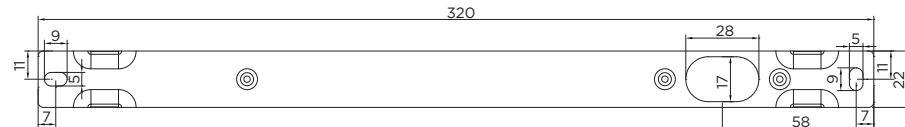


2.0

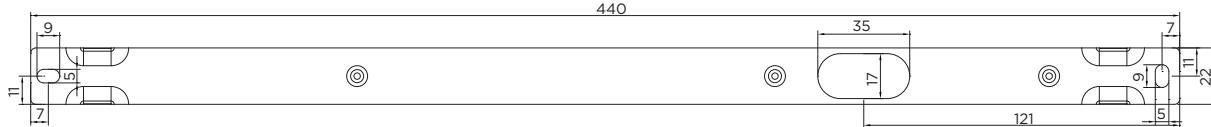


DIMENSIONS



MOUNTING INSTRUCTION

- 1 Loosen the four socket screws from the fixture.
- 2 Remove the mounting base from the fixture and mount it on the ceiling with screws (screws are not included).
- 3 POWER CONNECTION
Connect to 220-240V.
 
- 4 Attach the fixture to the mounting base by sliding it over completely against the ceiling.
- 5 Lock the fixture on the mounting base with the four socket screws.

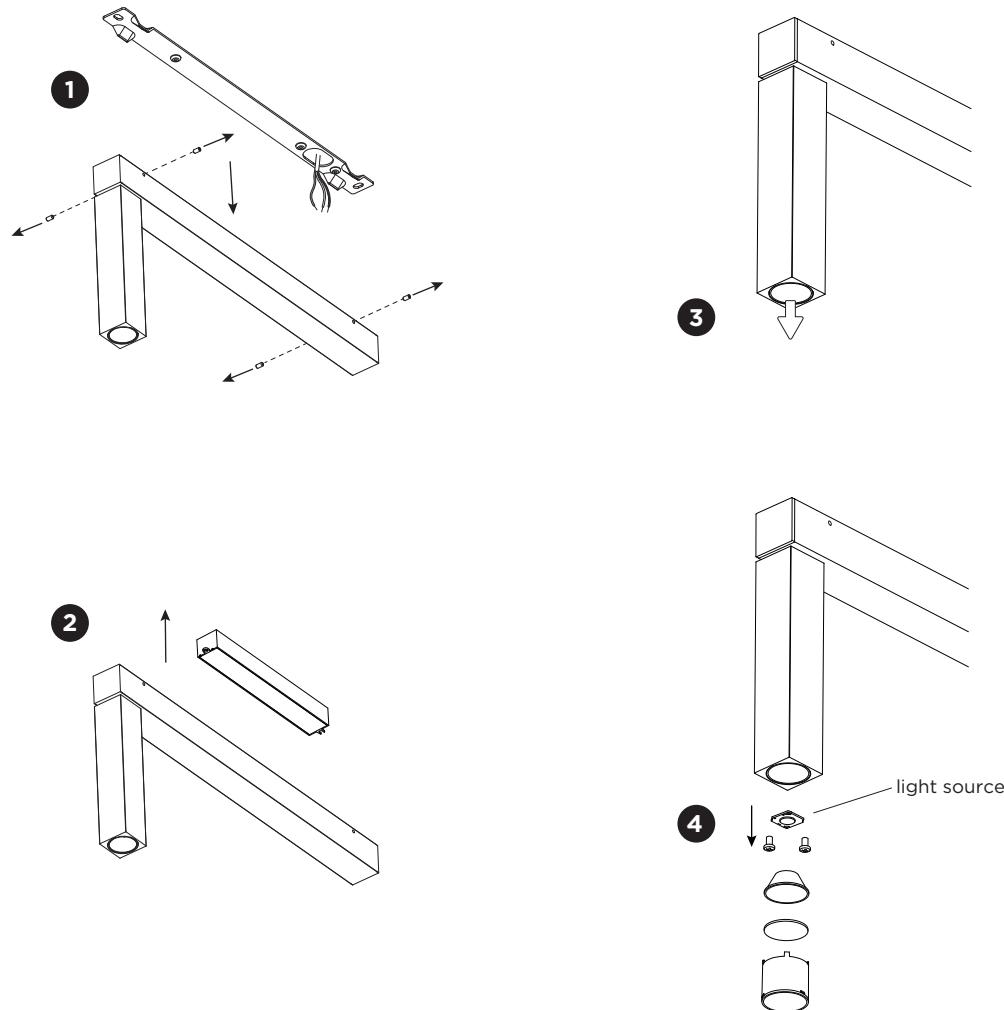


DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Loosen the four socket screws from the fixture to remove it from the mounting base.
- 2 Disconnect the wires and remove the driver.
- 3 Pull out the lens cover.
- 4 Take out all parts to and unscrew the light source to remove it.



The light source is replaceable by an authorized professional.
For advice contact your Wever & Ducré customer service contact point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class D.

