

SL MIKRO 3-ARRAY

At just 378 × 57 × 47 mm, the Artcoustic Mikro disappears into walls or ceilings yet delivers astonishing output and clarity.


With Smart-Fit magnetic installation, 100s of colour options, and weather-resistant design, Mikro is perfect for both residential and commercial spaces. Pair with an Artcoustic subwoofer for a discreet, full-range high-fidelity system.

Frequency range 300 Hz to 40 kHz
 Usable LF response 297 Hz (-6 dB)
 Coverage window 90° Horizontal, 35° Vertical
 Sensitivity @ 1 Watt 95 dB
 Power handling 45 Watt
 Maximum continuous SPL @ 1 meter 111 dB
 Maximum acoustic peak SPL crest factor 6 @ 1 meter 117 dB
 Rated Impedance 2 ohms
 Weight: 0.6 kg
 Dimensions: H: 378 W: 57 D: 47 mm
 Screen: Black, White, RAL/NCS Colours.





SCHEMATICS

dimensions are in mm

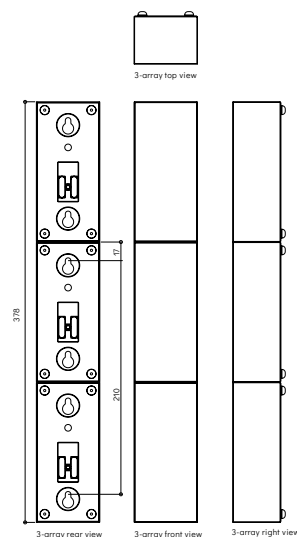

POLAR RESPONSE

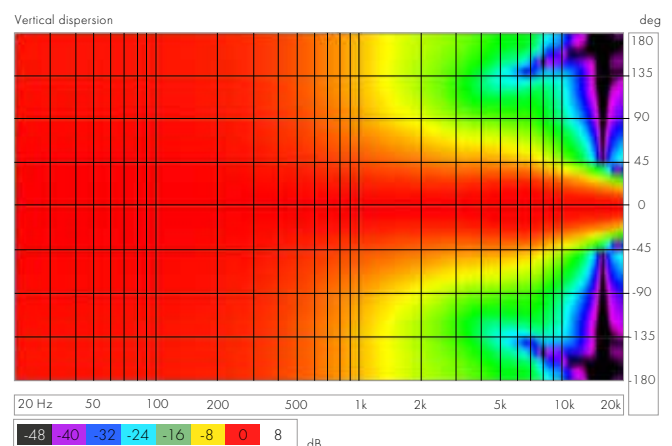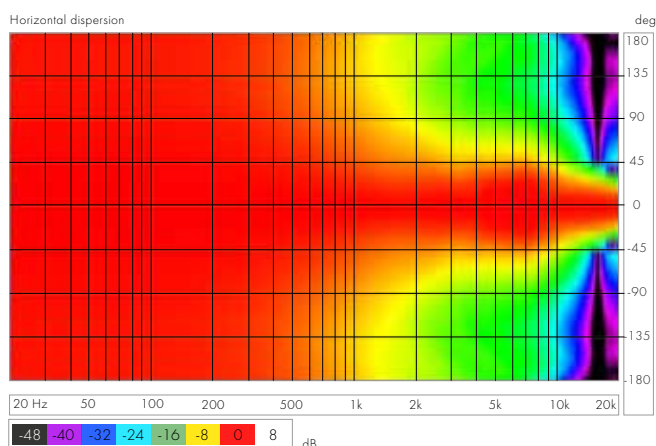


SL MIKRO

At just 126 × 57 × 47 mm, the Artcoustic Mikro fix onto walls or ceilings yet delivers astonishing output and clarity.


With 100s of colour options, and weather-resistant design, Mikro is perfect for both residential and commercial spaces. Pair with an Artcoustic subwoofer for a discreet, full-range high-fidelity system. The Mikro can also be assembled in arrays of up to three speakers, offering greater output and flexibility while keeping the same compact, discreet form.

Frequency range 300 Hz to 40 kHz
 Usable LF response 297 Hz (-6 dB)
 Coverage window 90° Horizontal, 90° Vertical
 Sensitivity @ 1 Watt 86 dB
 Power handling 15 Watt
 Maximum continuous SPL @ 1 meter 102 dB
 Maximum acoustic peak SPL crest factor 6 @ 1 meter 108 dB
 Rated Impedance 8 ohms
 Weight: 0.2 kg
 Dimensions: H: 126 W: 57 D: 47 mm
 Screen: Black, White, RAL/NCS Colours.


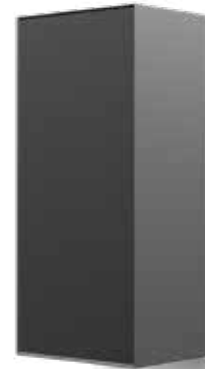


SCHEMATICS

dimensions are in mm

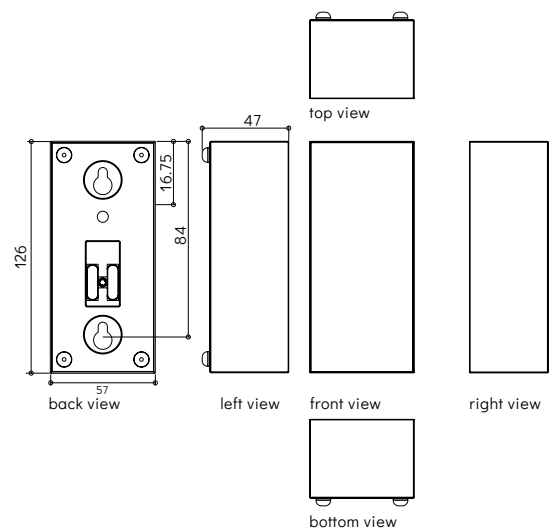

POLAR RESPONSE

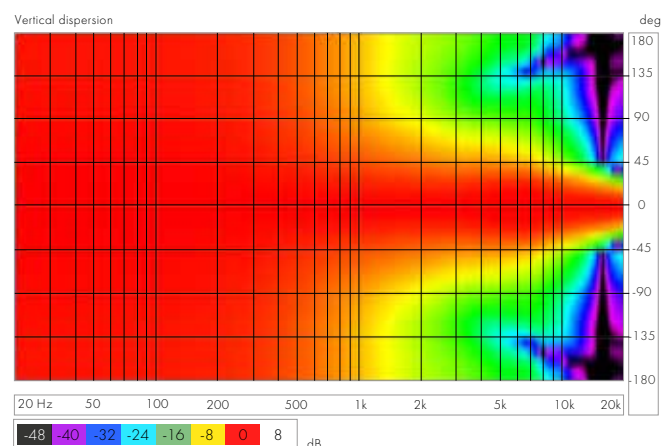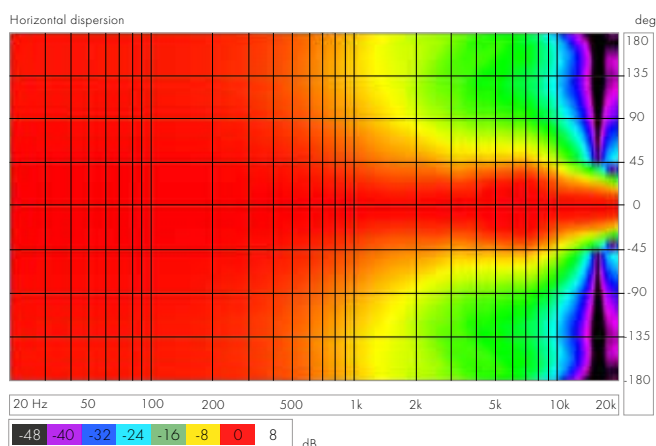

SL MIKRO 2-ARRAY

At just 252 × 57 × 47 mm, the Artcoustic Mikro disappears into walls or ceilings yet delivers astonishing output and clarity.

With Smart-Fit magnetic installation, 100s of colour options, and weather-resistant design, Mikro is perfect for both residential and commercial spaces. Pair with an Artcoustic subwoofer for a discreet, full-range high-fidelity system.

Frequency range 300 Hz to 40 kHz

Usable LF response 297 Hz (-6 dB)

Coverage window 90° Horizontal, 35° Vertical

Sensitivity @ 1 Watt 92 dB

Power handling 30 Watt

Maximum continuous SPL @ 1 meter 108 dB

Maximum acoustic peak SPL crest factor 6 @ 1 meter 114 dB

Rated Impedance 4 ohms

Weight: 0.4 kg


Dimensions: H: 252 W: 57 D: 47 mm

Screen: Black, White, RAL/NCS Colours.



SCHEMATICS

dimensions are in mm

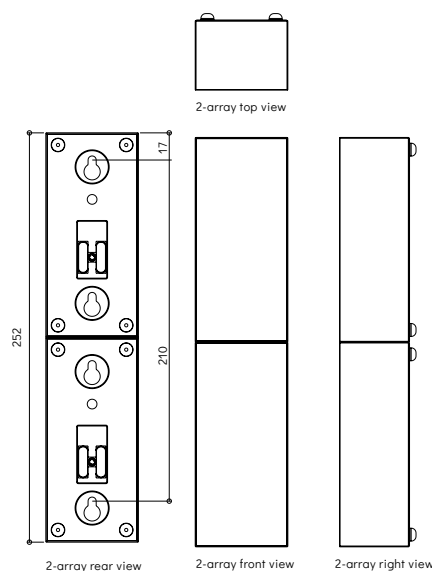

POLAR RESPONSE

