

ROOMOR WALL 4.0

11-Sep-2018

4.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz
 CE IP20 45°/45° 30°/30°

BODY COLOUR

black texture (Cable Plug with floor switch)
 black texture (Cable base round)

339520B...
 339620B...

OPTIONAL

No shade

00

SHADE 1.0

black texture
 black texture + gold
 felt grey (max.15W)

B1
 K1
 F1

SHADE 2.0

black texture
 black texture + gold
 felt grey (max.15W)

B2
 K2
 F2

SHADE 3.0

black texture
 black texture + gold
 felt grey (max.15W)


B3
 K3
 F3

for PAR16 lamps see our catalogue



SHADE 1.0




SHADE 2.0



SHADE 3.0

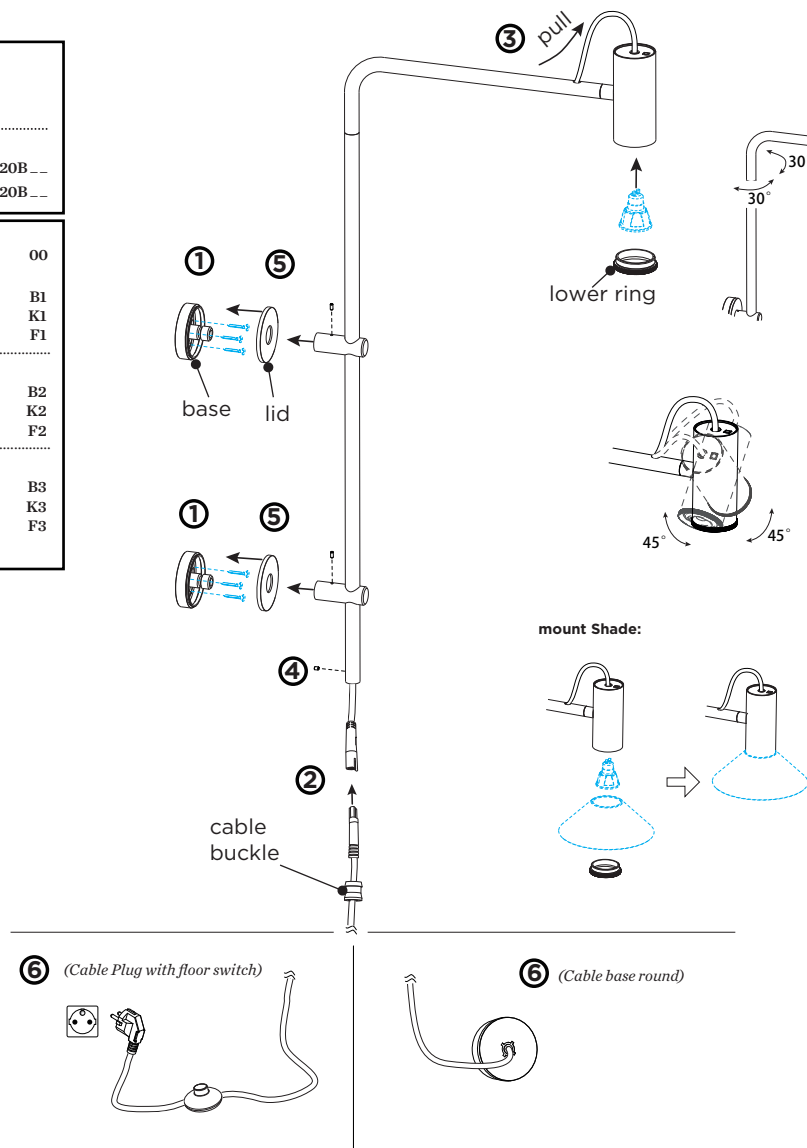

DIMENSIONS



MOUNTING INSTRUCTION

- Open the lid, and mount the base on the wall, and then close the lid by pressing.
- Connect the cable plugs.
- Pull the cable up so that the connected plugs can get into the tube of the luminaire body.
- Put inside by pressing and fix the cable buckle with the allen screw.
- Install the luminaire body on the base and fix it with the allen screw
- for Cable Plug with floor switch:
Power connected with the plug.

for Cable base round:

Mount the round base on the wall

(You have to turn the cover counterclockwise a quarter in order to loosen it from the base and mounting back on is by turning clockwise.)

POWER CONNECTION

Connect the wires
 connection: STANDARD version

